

Operation Guide 5770


CASIO®

You can also find information about operational procedures at the CASIO website.

<https://s.casio.jp/mw/en/5770/>



- Your watch may differ somewhat from the one shown in the illustration.

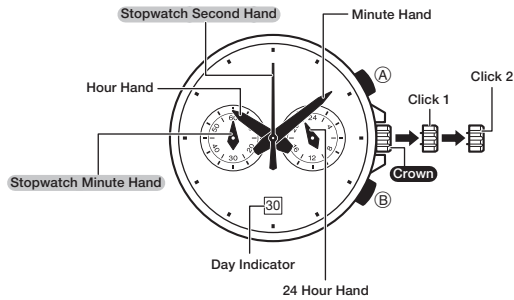

Stopwatch functions

To adjust the time setting

Pull the **Crown** out to Click 2.

Rotate the **Crown** to change the time setting.

Push the **Crown** back in.

Note

- Take care that you set the correct AM or PM time.

To change the day indicator setting

Pull the **Crown** out to Click 1.

Rotate the **Crown** away from you to set the day.


Push the **Crown** back in.

Note

- The day indicator setting uses a 31-day month. Make adjustments for months of shorter lengths.
- Avoid changing the day indicator setting between the hours of 9 p.m. and 1 a.m. Otherwise, the day indicator may not change correctly at midnight.


Crown Operations

Some water-resistant models (10BAR, 20BAR) have a screw-in crown. When you need to perform a crown operation, rotate it towards you to unscrew it. Then pull the crown out. Avoid applying undue force when pulling. The watch loses its water resistance while the crown is unscrewed. After performing a crown operation, fully screw the crown back in.



If your watch has a rotary bezel...

You can rotate the bezel to align its ▼ mark with the minute hand. Then you will be able to tell how much time has elapsed since aligning the ▼ mark.



Using the Stopwatch

The stopwatch measures elapsed time in 1-second increments up to 59 minutes, 59 seconds.

Elapsed time



Important!

- Do not operate the stopwatch with the crown pulled out.

Note

- An elapsed time operation will stop automatically at the end of 60 minutes.

Correcting the 0 Positions of the Hand

Perform the following procedure if the Stopwatch Second Hand does not return to its 0 (zero) position when you reset the stopwatch.

Pull the **Crown** out to Click 2.

Use **(A)** to move the **Stopwatch Second Hand** to 12 o'clock.

- Holding down **(A)** will move the second hand at high speed, until you release the button.

After the hand is the way you want, push the **Crown** back in.

Important!

- Timekeeping stops while the crown is pulled out. Correct the current time setting after performing the above operation.

Specifications

Accuracy: ±20 seconds average per month

Stopwatch: Measuring Capacity: 59'59" (60 minutes)
Measuring Unit: 1 second
Measurements: Elapsed time

Battery: One silver oxide battery (Type: SR927W)
Battery nominal voltage: 1.55V

Battery Life: Approximately 5 years (60 minutes stopwatch operation per day)

Specifications are subject to change without notice.